

Robo-Fit, inc. PUSH BUTTON VALVES



PUSH BUTTON VALVES

CONSTRUCTION	•CA377 Brass	FEATURES/BENEFITS
APPLICATIONS	•Sampling Valve	
	Pressure Relief	 Instantaneous On/Off
	•Valve Injection	•Multiple O-Ring Options
	•Drain Valve	•Flexible End Connection
	•Holds Vacuum	•Forged Brass Body
	Maximum Pressure : 500 PSIG	•90° Configuration
RANGES	•Temperature:	•Made in USA
	-40° to 300° F (Standard)	•Guaranteed Quality
	-40° to 400° F (Special)	

PB2 FPT x FPT

PART NUMBER	FPT	FPT	STYLE	OPERATOR
PB2-J	1/8"	1/8"	STANDARD	PUSH BUTTON
PB2-3A-J	1/8"	1/8"	PANEL MOUNT	PUSH BUTTON
PB2-L	1/4"	1/4"	STANDARD	PUSH BUTTON
PB2-3A-L	1/4"	1/4"	PANEL MOUNT	PUSH BUTTON








STRAINER VALVES

STRAINER VALVES

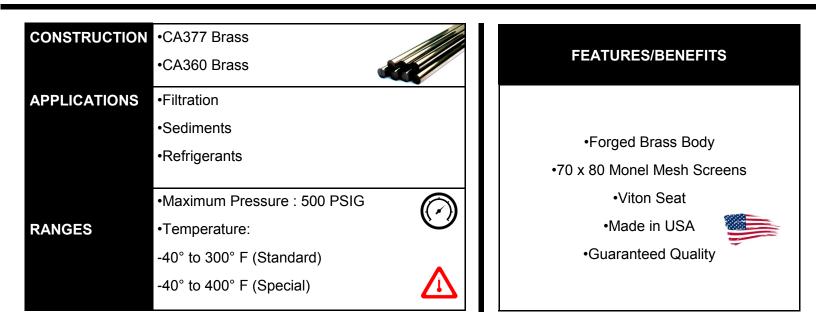

234 STRAINER VALVES

PART NUMBER	THREAD	THREAD
234SJ	1/8" FPT	1/8" FPT
234SL	1/4" FPT	1/4" FPT
234S-4L	1/8" FPT	1/4" MALE FLARE



234SJ/234SL



234S-4L

